

# NNIN Nanotechnology Education

	lame:	Date:	C	Class:	
--	-------	-------	---	--------	--

### **Student Worksheet**

# Optical Fiber Limbo: Guided Activity

#### **Safety**

Optical fibers may break if bent too much. Clean up all broken fibers carefully for the splinters are difficult to see and can easily become attached to clothing and hands.

#### Introduction

You will be testing the bending limits of various optical fibers, and then using an optical fiber to send a message.

#### **Materials**

- continuity tester
- assorted optical fibers
- ruler
- canvas square
- twisty ties
- laser pointer

#### Question


How does bending an optical fiber affect its ability to contain and guide light?

**Make a Prediction** 

#### **Procedure: Part I**

- Loop an optical fiber onto a canvas square as shown in the diagram to the right. Tie down the loop with twisty ties as the photo indicates.
- 2. Place one end of the fiber into the continuity checker and check that the light is being guided through the fiber by looking for light at the other end of the fiber.
- 3. Place a ruler under the loop such that the diameter of the loop can be easily measured.





NNIN Document: NNIN-1181

Rev: 11/09

- 4. Slowly pull the free end of the fiber so that the loop tightens. Stop when the loop begins to glow (indicating that light is escaping the fiber at that point).
- 5. Measure the diameter of the loop in centimeters and record the diameter and corresponding radius.

#### **Record Your Observations**

Data Table: Bending radii of various optical fibers

Optical Fiber	Diameter of Loop (cm)	Bending Radius (cm)

Ar	nalyze the Results
1.	Which type of optical fiber will give the smallest footprint? Why?
2.	Does the diameter of the optical fiber affect its bending radius? Why or why not?
Pr	ocedure: Part II
1.	Using the Morse code sheet (see the last page of this lab), translate a short phrase into Morse
	code to be sent through a 4 m long unjacketed optical fiber. Your teacher will pair you with

Original Message:

Message in Morse Code:

National Nanotechnology

another lab group to trade messages.


<del>росын</del>ent: NNIN-хххх Rev: mm/yy

2.	Write the message you received from the other group on the first line, then translate it on the second line:					
1.	cord Your Observations  Was the receiving team able to properly decode your message?  What were some problems encountered?					
Ŋ۰	aw Conclusions					
	In this activity, your group was directly linked to a receiving group by an optical fiber.  However, it is not practical to provide 15 optical fibers to link your group to each of the rest of the lab groups. Propose a method to link all the groups in the class with the least number of optical fibers.					
2.	Often in communication lines, different messages need to be sent through an optical fiber at the same exact moment; however, the messages would then be jumbled together. Propose a method to solve this problem.					

NNIN Document: NNIN-xxxx

## International Morse Code

- 1. A dash is equal to three dots.
- 2. The space between parts of the same letter is equal to one dot.
- 3. The space between two letters is equal to three dots.
- The space between two words is equal to seven dots.

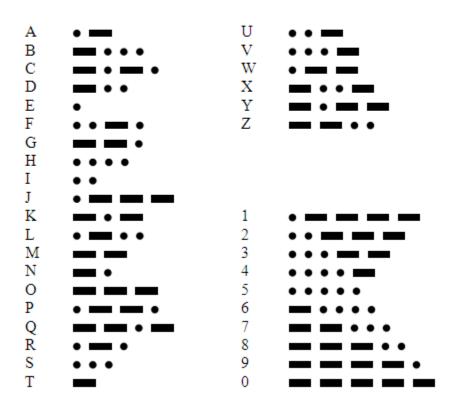

This image is from Wikipedia: http://en.wikipedia.org/wiki/Morse\_code August 6, 2008

National Nanotechnology Infrastructure Network

Rev: mm/yy

Page 4

NNIN Document: NNIN-xxxx

www.nnin.org

NNIN Document: NNIN-xxxx

Rev: mm/yy